




ISOSTATIC BEARING LIMITED

7006 ACE/HCP4AH1 SKF High Speed Angular Contact Ball Bearings

Bearing No. 7006 ACE/HCP4AH1

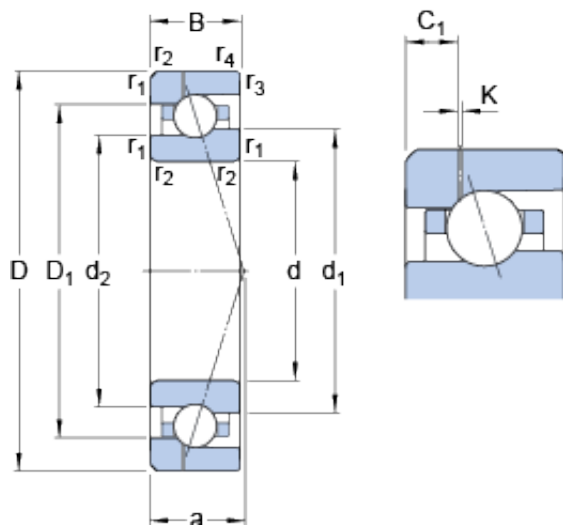

7006 ACE/HCP4AH1 Bearing 2D drawings and 3D CAD models

Size	55x30x13 mm
Bore Diameter	55 mm
Outer Diameter	30 mm
Width	13 mm
d	30 mm
D	55 mm
B	13 mm
d ₁	38.2 mm
d ₂	36.4 mm
D ₁	45.81 mm
K	0.5 mm
C ₁	4.23 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.6 mm
a	16.4 mm
d _a - min.	34.6 mm
d _b - min.	34.6 mm
D _a - max.	50.4 mm
D _b - max.	50.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	39.9 mm
Basic dynamic load rating - C	8.8 kN
Basic static load rating - C ₀	5 kN



ISOSTATIC BEARING LIMITED

Fatigue load limit - P_u	0.212 kN
Limiting speed for grease lubrication	42000 r/min
Limiting speed for oil lubrication	65000 mm/min
Ball - D_w	6.35 mm
Ball - z	17
G_{ref}	1.7 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	80 N
Preload class B - G_B	240 N
Preload class C - G_C	480 N
Calculation factor - f	1.05
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2C}	1.06
Calculation factor - f_{HC}	1.01
Preload class A	79 N/micron
Preload class B	117 N/micron
Preload class C	153 N/micron
d_1	38.2 mm
d_2	36.4 mm



ISOSTATIC BEARING LIMITED

D_1	45.81 mm
C_1	4.23 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	34.6 mm
d_b min.	34.6 mm
D_a max.	50.4 mm
D_b max.	50.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	39.9 mm
Basic dynamic load rating C	8.84 kN
Basic static load rating C_0	5 kN
Fatigue load limit P_u	0.212 kN
Attainable speed for grease lubrication	42000 r/min
Attainable speed for oil-air lubrication	65000 r/min
Ball diameter D_w	6.35 mm
Number of balls z	17
Reference grease quantity G_{ref}	1.7 cm ³
Preload class A G_A	80 N
Static axial stiffness, preload class A	79 N/ μ m
Preload class B G_B	240 N
Static axial stiffness, preload class B	117 N/ μ m
Preload class C G_C	480 N
Static axial stiffness, preload class C	153 N/ μ m
Calculation factor f	1.05
Calculation factor f_1	0.99
Calculation factor f_{2A}	1



ISOSTATIC BEARING LIMITED

Calculation factor f_{2B}	1.03
Calculation factor f_{2C}	1.06
Calculation factor f_{HC}	1.01
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.1 kg